


External Cable Overview, SAILOR 6000B A4 GMDSS Package, 150W/2 x Radiotelex, mini-C - Incl. Console - DC Floating

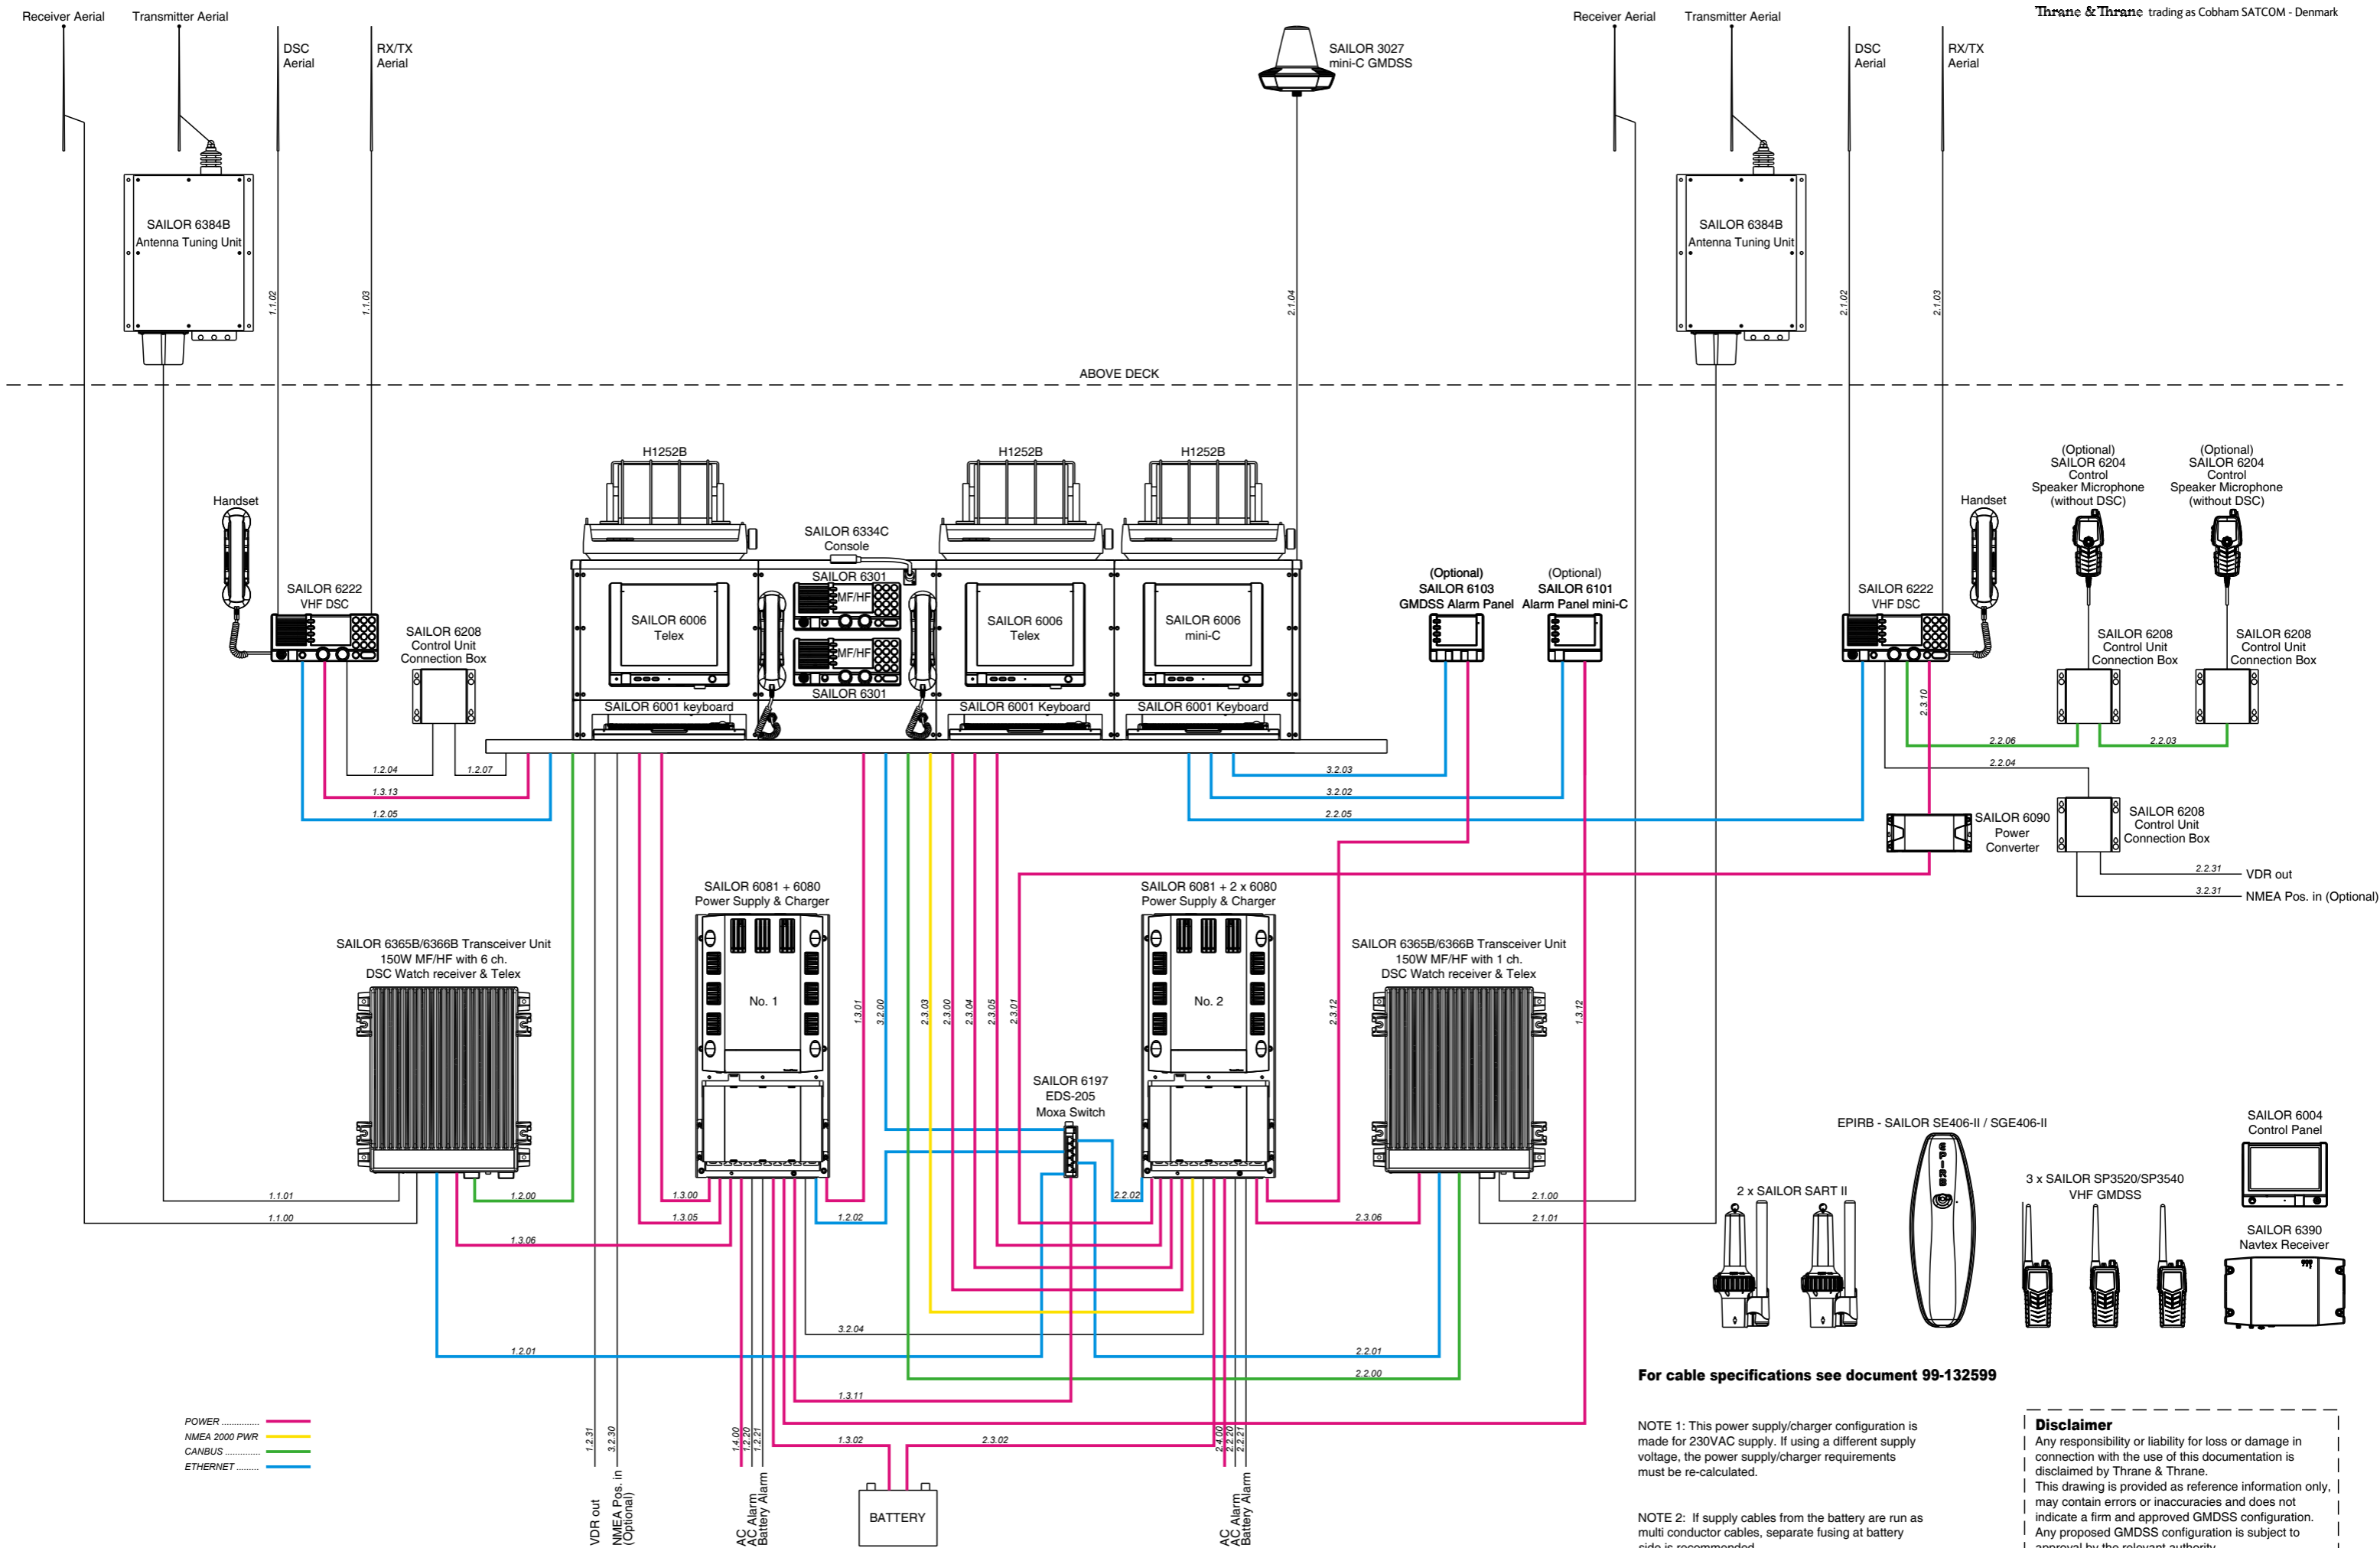

For cable specifications see document 99-132599

NOTE 1: This power supply/charger configuration is made for 230VAC supply. If using a different supply voltage, the power supply/charger requirements must be re-calculated.

NOTE 2: If supply cables from the battery are run as multi conductor cables, separate fusing at battery side is recommended.

Disclaimer
Any responsibility or liability for loss or damage in connection with the use of this documentation is disclaimed by Thrane & Thrane. This drawing is provided as reference information only, may contain errors or inaccuracies and does not indicate a firm and approved GMDSS configuration. Any proposed GMDSS configuration is subject to approval by the relevant authority.